



CHAMELEON TV MOUNT

PM2


TWIN & QUAD WIDTH CABINETS

BEFORE YOU BEGIN

- This TV mount is intended for use with Flat-Panel TV 60" or smaller and a maximum weight of 175lbs. (79kg).
- Carefully inspect the mount for shipping damage or missing parts. If any damage is apparent or you are missing parts contact Salamander Designs at 800-535-5659.
- Read ALL instructions before assembly. If you have any questions, please contact your installation contractor or Salamander Designs.
- Use with products heavier than the maximum weight or larger than the size indicated may result in instability causing possible injury.
- Mounts must be attached as specified in assembly instructions. Improper installation can result in serious personal injury.



1. DISASSEMBLE

- Remove rear panels.
- Disassemble top from frame using 5/32" hex key.
- Disassemble horizontal post using 1/4" hex key.

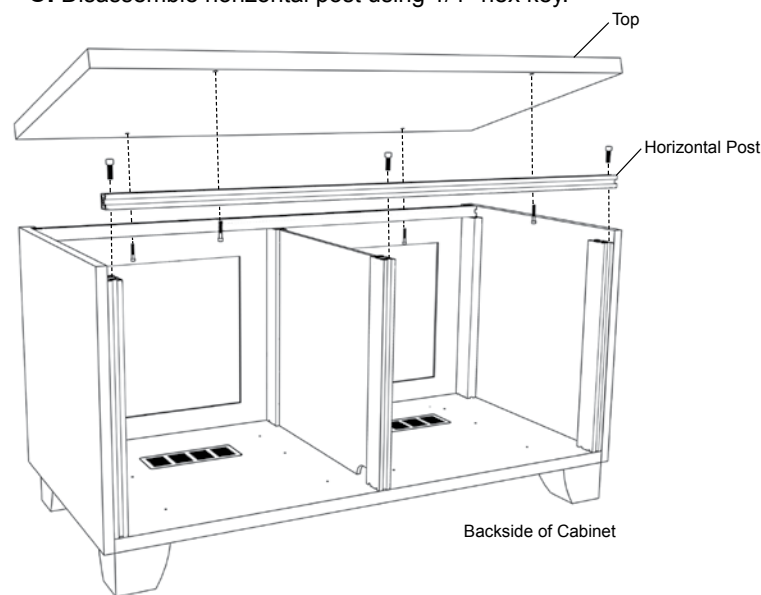

2. INSTALL FLAT NUTS

Slide one flat nut into the rear t-slot at locations shown.
Note: Flat nut may be put in with either side facing out.

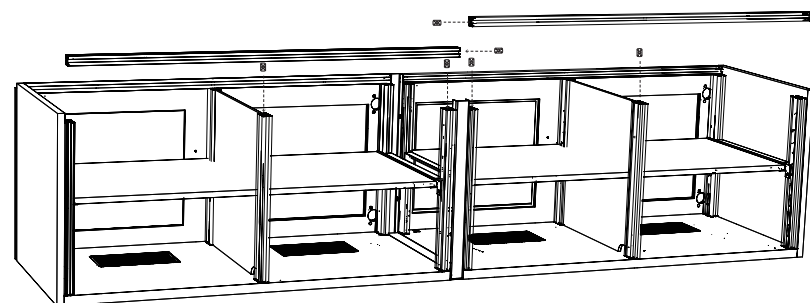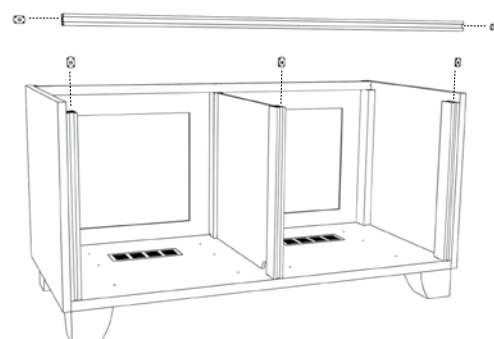


3. RE-ASSEMBLE

Re-assemble horizontal post, top and rear panels.


4. ASSEMBLE MOUNT

Secure Bottom Brace to TV Posts with 1/2" length screws with large side channel on top.

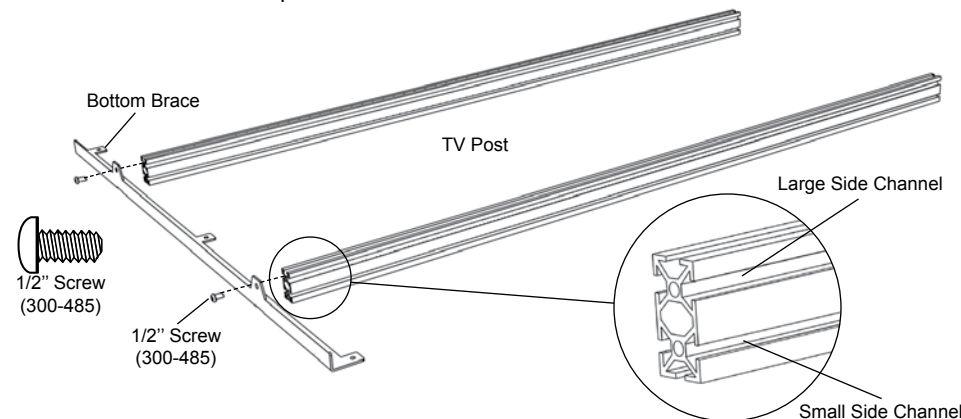




5. ATTACH MOUNT TO CABINET

Using 3/8" length screws, secure bottom brace into flat nuts in vertical posts.

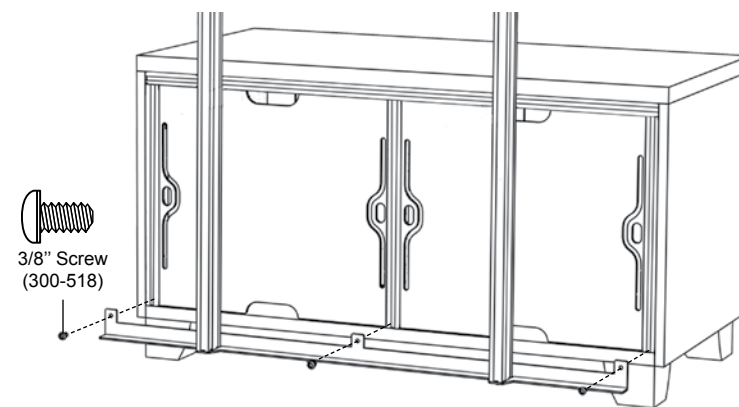


6. ATTACH "L" BRACKETS

- Loosely assemble hardware through "L" brackets as shown.
- Slide "L" brackets with flat nuts down large channel from top of TV Posts.
- Use 3/8" length screw through hole in short side of "L" bracket to secure to flat nuts in horizontal post. In vertical posts secure "L" brackets.

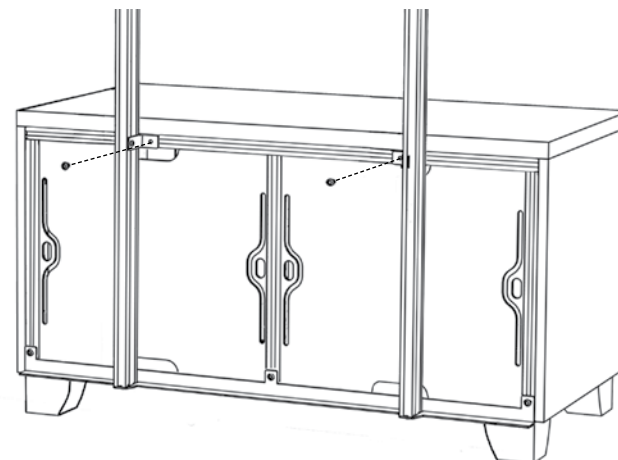


7. INSTALL BLACK PANEL

- Loosely assemble 3/4" length screw with flat nut as shown (2x).
- Install black panel by sliding the panel with flat nuts down the front post channels then secure in place.

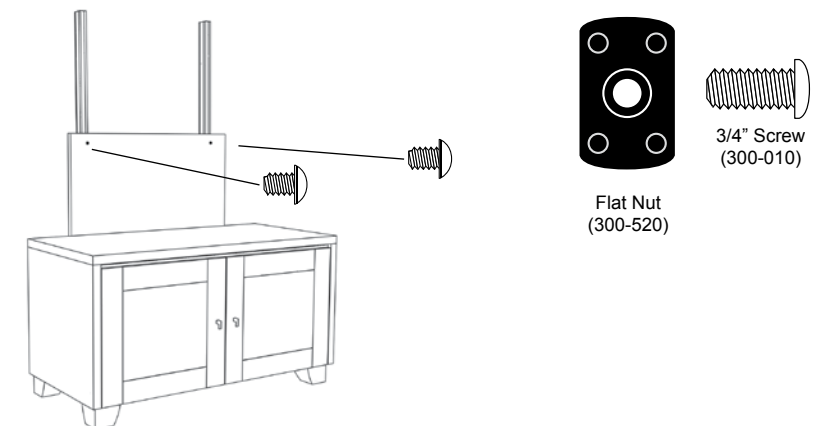

8. INSTALL TV BRACKET + TOP BRACE

- Locate Large Bracket in FX 100/L Box. Loosely install hardware through holes indicated (3/8" length screws, washers, and flat nuts).
- Install Large Bracket by sliding flat nuts down the front post channels, following the black panel. Secure at desired position.
- Install top brace using four 3/4" screws.

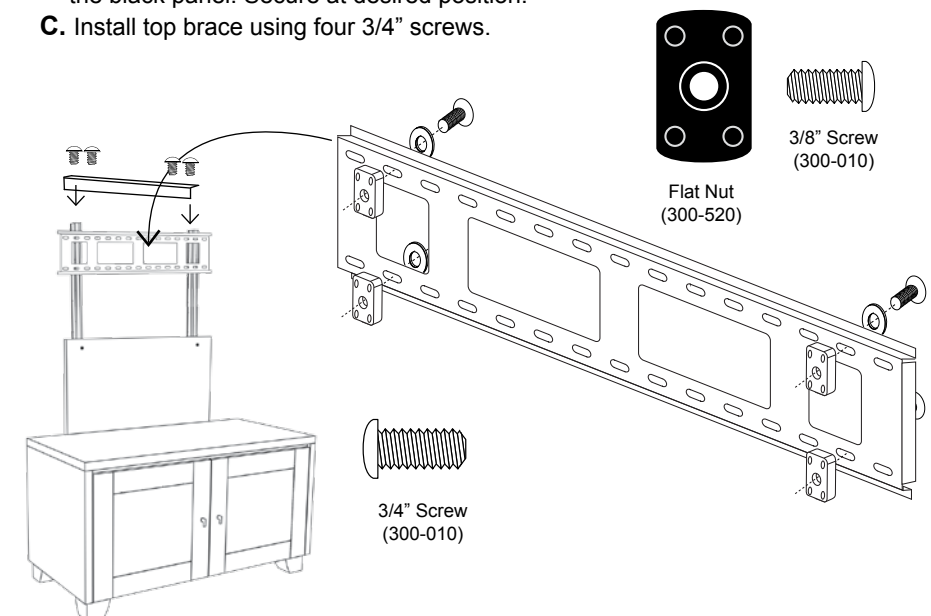

9. FX100/L INSTRUCTIONS

Continue on to the instructions included in the box labeled FX100/L.
Note: Step 1 of the FX100/L instructions do not apply to your Chameleon product.

10. WIRE MANAGEMENT

After installing your components, gather wires/cables and attach wire managers by clipping in post channels.



LIMITED WARRANTY

Five full years Salamander Designs Ltd will repair or replace, at our option, any product defective in materials or craftsmanship. Salamander Designs Ltd. will not be responsible for any damage to or destruction of other equipment consequential to our equipment failure. Defective product must be given Return Authorization and is to be returned to the factory prepaid, in the original carton and packing material. Any damage incurred in a shipment not in original packaging shall be the responsibility of the owner. Warranty repairs will be returned prepaid, via UPS within the continental U.S.A. only.

Visit us at www.salamanderdesigns.com.




CHAMELEON TV MOUNT PM2 TRIPLE WIDTH CABINETS

BEFORE YOU BEGIN

- This TV mount is intended for use with Flat-Panel TV 60" or smaller and a maximum weight of 175lbs. (79kg).
- Carefully inspect the mount for shipping damage or missing parts. If any damage is apparent or you are missing parts contact Salamander Designs at 800-535-5659.
- Read ALL instructions before assembly. If you have any questions, please contact your installation contractor or Salamander Designs.
- Use with products heavier than the maximum weight or larger than the size indicated may result in instability causing possible injury.
- Mounts must be attached as specified in assembly instructions. Improper installation can result in serious personal injury.


1. DISASSEMBLE

- Remove rear panels.
- Disassemble top from frame using 5/32" hex key.
- Disassemble horizontal post using 1/4" hex key.

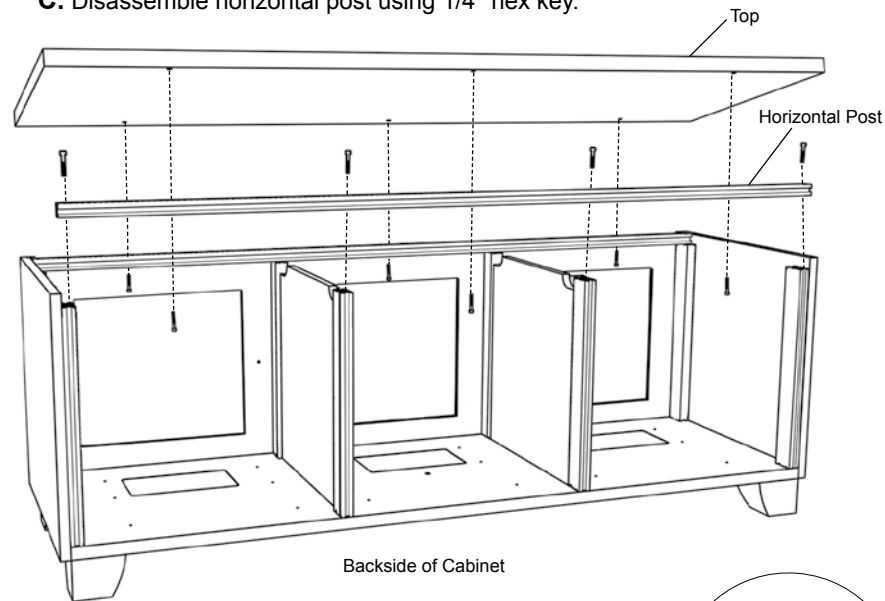

2. INSTALL BRACKETS

- Loosely assembly hardware as shown.
- Slide flat nut on the short side of the "L" bracket down the vertical posts (2 down each post).

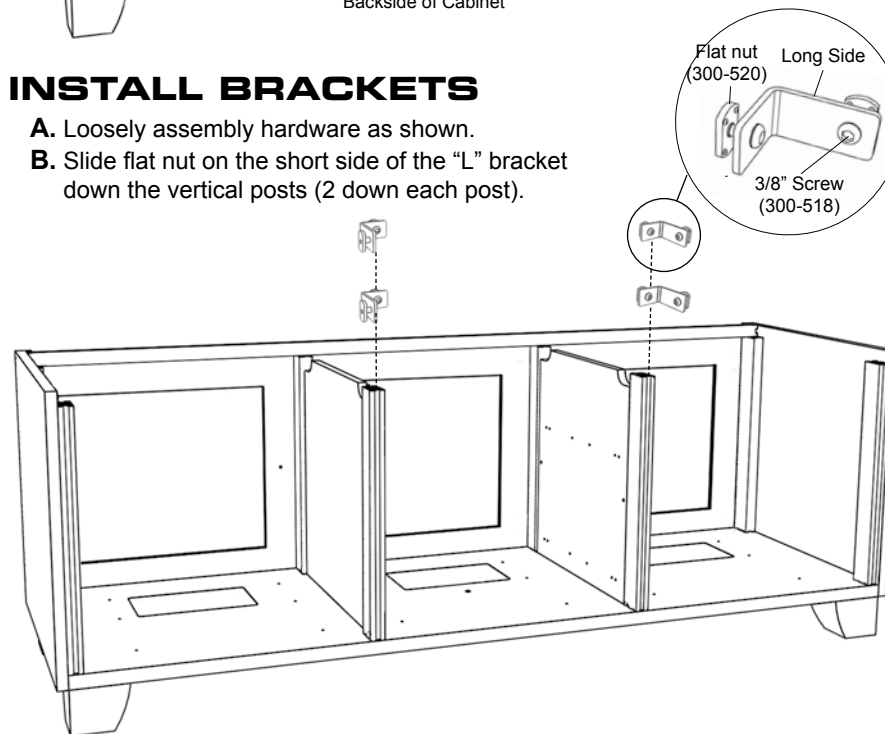


3. RE-ASSEMBLE

Re-assemble horizontal post, top and rear panels.


4. SECURE BRACKETS

Secure one bracket at the top and secure one at the bottom of both vertical posts. Note the positions of the brackets in the drawing.

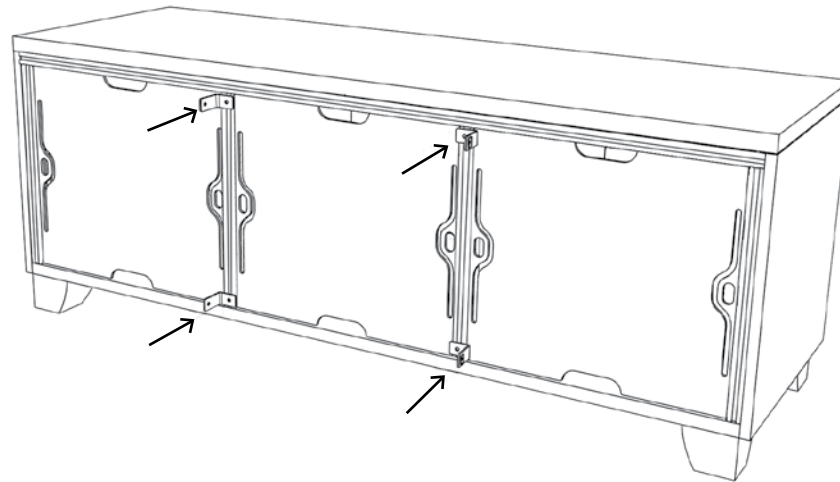


5. INSTALL POSTS

- Loosely assemble 3/8" length screw with a flat nut in "L" Brackets.
- Install by sliding posts into flat nuts in the large side channel of the posts.
- Secure in place after feet are installed (D).

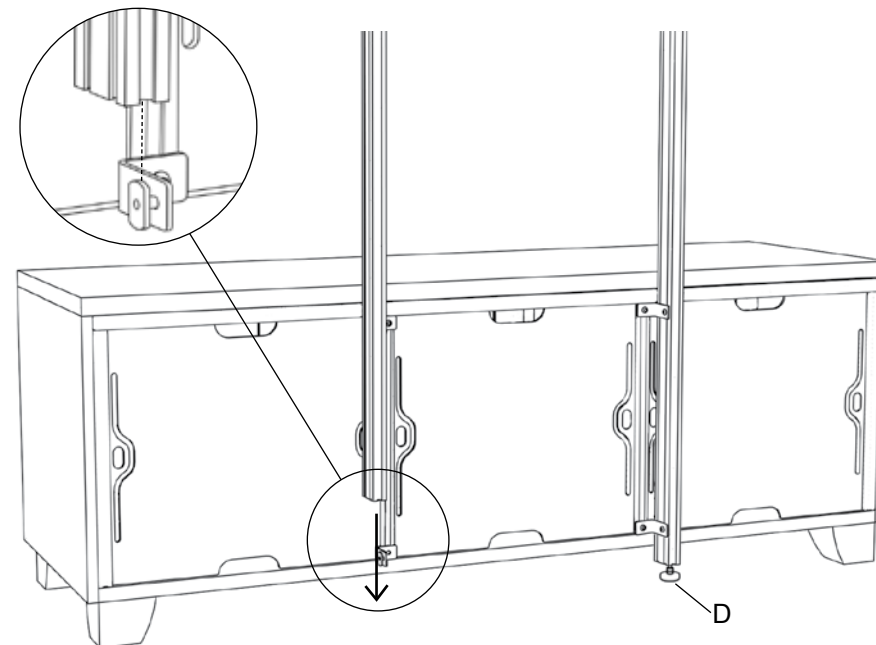


- Twist nut on leveler foot to the bottom of the foot. At the end of each post screw the leveler foot into the end. Note: Screw the leveler on the side with the Large Channel.

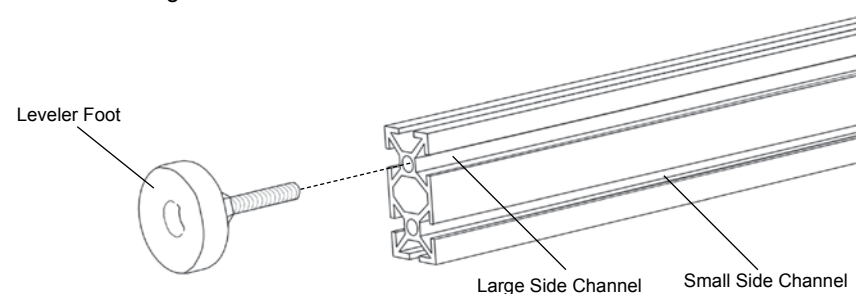


7. INSTALL BLACK PANEL

- Loosely assemble 3/4" length screw with flat nut as shown (2x).
- Install black panel by sliding the panel with flat nuts down the front post channels then secure in place.

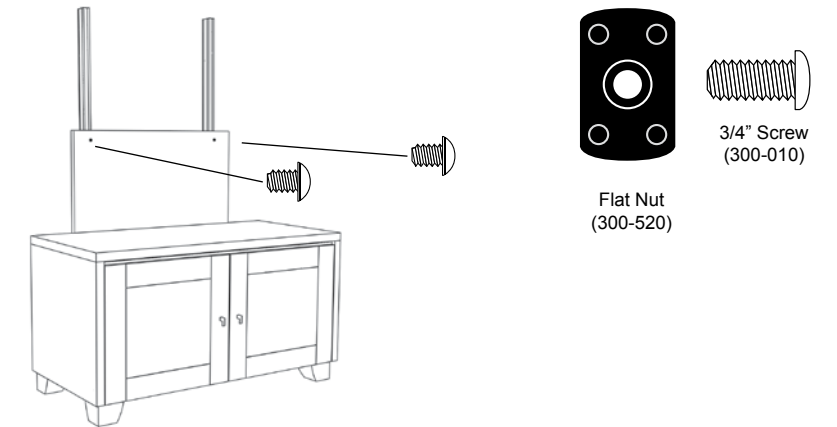

8. INSTALL TV BRACKET + TOP BRACE

- Locate Large Bracket in FX 100/L Box. Loosely install hardware through holes indicated (3/8" length screws, washers, and flat nuts).
- Install Large Bracket by sliding flat nuts down the front post channels, following the black panel. Secure at desired position.
- Install top brace using four 3/4" screws.

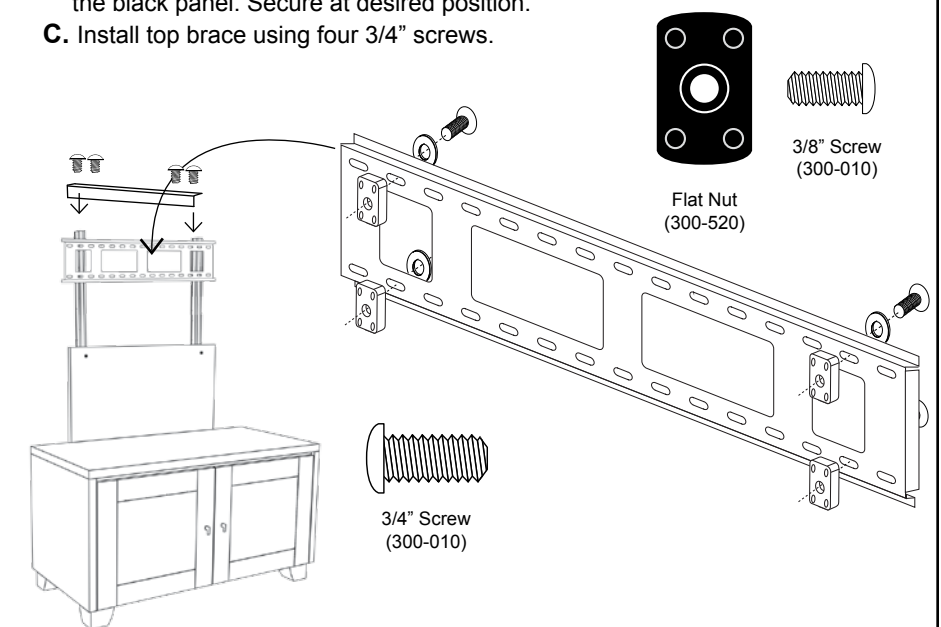


9. FX100/L INSTRUCTIONS

Continue on to the instructions included in the box labeled FX100/L.
Note: Step 1 of the FX100/L instructions do not apply to your Chameleon product.

10. WIRE MANAGEMENT

After installing your components, gather wires/cables and attach wire managers by clipping in post channels.



LIMITED WARRANTY

Five full years Salamander Designs Ltd will repair or replace, at our option, any product defective in materials or craftsmanship. Salamander Designs Ltd. will not be responsible for any damage to or destruction of other equipment consequential to our equipment failure. Defective product must be given Return Authorization and is to be returned to the factory prepaid, in the original carton and packing material. Any damage incurred in a shipment not in original packaging shall be the responsibility of the owner. Warranty repairs will be returned prepaid, via UPS within the continental U.S.A. only.

Visit us at www.salamanderdesigns.com.